



GAS RANGES

Model	Product ID	Gas	Ovens	Burners
KR6	919585	Natural	1	6

STANDARD FEATURES

All ranges are shipped as Natural Gas and have a conversion kit included to convert to Propane.

30,000 BTU cast iron burners

- Individual pilot lights
- Heavy duty 12" x 12" removable cast iron grates
- Push-in knob with efficient Hi-Lo flame control

Full size oven

- 30,000 BTU oven burner
- Cool to touch oven door handle
- (2) adjustable oven racks per oven that are easy to remove
- Compression spring door system
- Flame failure safety device
- Adjustable thermostat: 250°F to 550°F
- Holds full size sheet pans

Construction

- Heavy duty steel frame
- Stainless steel front - 24 3/5" high backriser & shelf
- Removable crumb tray under the top burners
- 6" adjustable stainless steel legs
- 3/4" NPT rear gas connection

WARRANTY

Kintera Gas Cooking Equipment is warranted to be free from defects in material and workmanship under normal use and service for a period of 1 year from the date of original purchase.



KR6
Gas Regulator Included

SPECIFICATIONS


The Kintera Commercial Gas Range has powerful 30,000 BTU cast iron burners. Each burner has an individual pilot light - heavy duty 12" x 12" removable cast iron grate and individual instant light control knobs. It is constructed with a stainless steel front, 24 3/5" high backriser and shelf and 6" adjustable stainless steel legs or casters.

The standard oven is powered with a 30,000 BTU burner and comes with two easy to remove oven racks. It includes a no-chip nano porcelain oven liner for easy cleaning and a compression spring door hinge system for durability. The oven thermostat adjusts from 250°F to 550°F and is equipped with a flame failure safety device.



IMPORTANT INFORMATION

- A pressure regulator is provided with this unit.
Natural Gas 4" (102 mm) W.C.
- 3/4" NPT (19mm) rear gas connection.

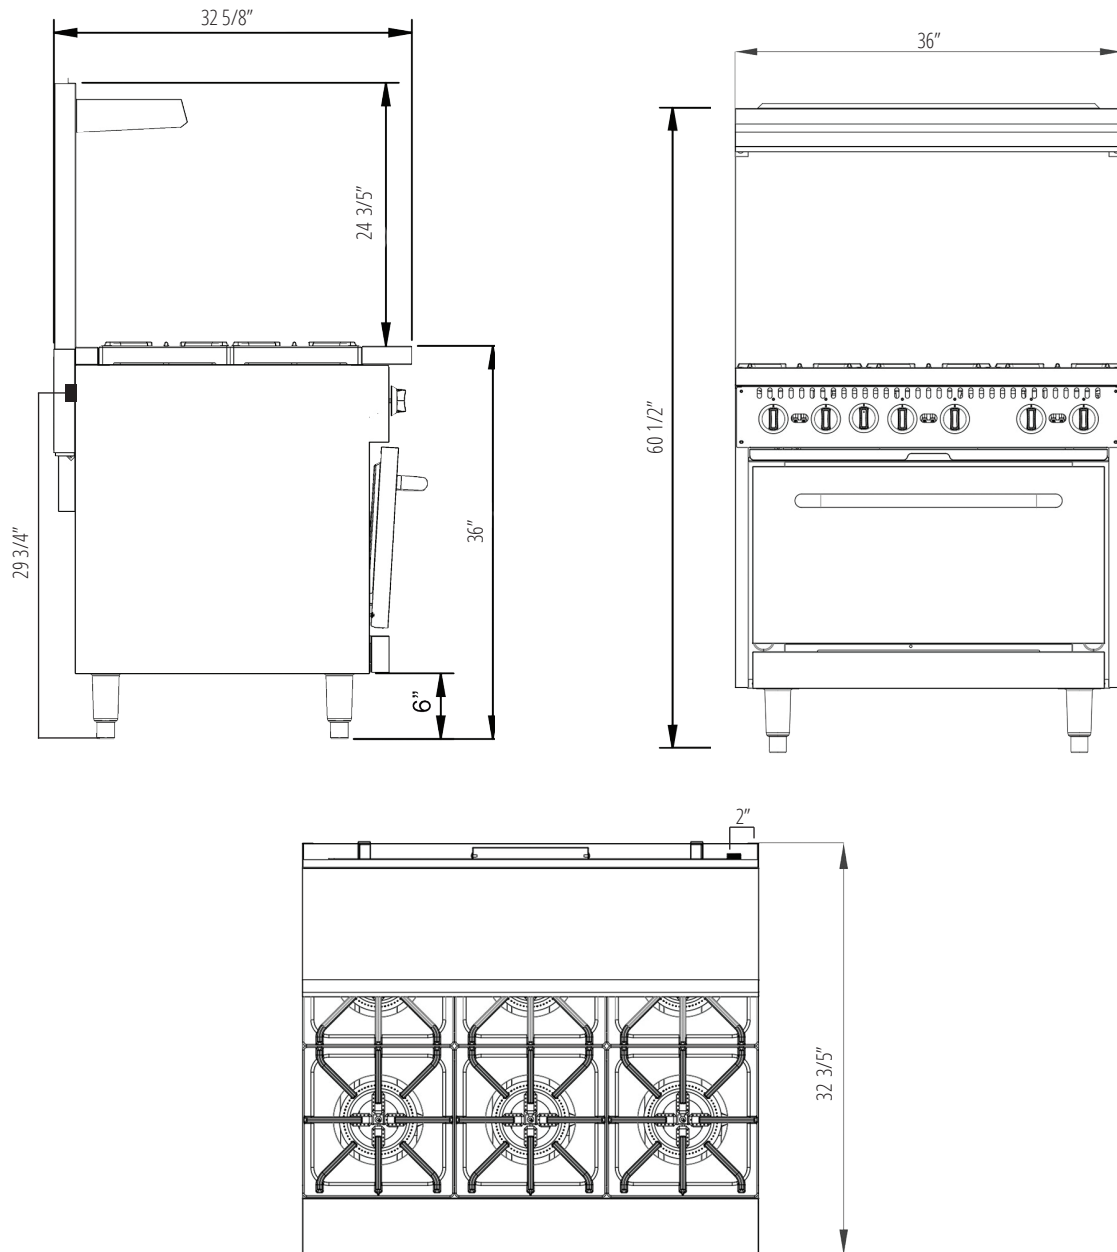

Model	Product ID	Burners	External Dimensions (in)			Internal Oven Dimensions (in)			BTU's (per open burner)	BTU's (per oven)	Total BTU's	Crated Weight (lbs)
			W	D	H	W	D	H				
KR6	919585	6	36	32 5/8	35 9/10 + 24 3/5	26 4/5	25 4/5	13 7/10	30,000	30,000	210,000	455