

GAS RANGES WITH GRIDDLE

Model	Product ID	Ovens	Burners	Griddle
K6G24	919588	2	6	24"

STANDARD FEATURES

Top Burner

- Cast iron burners each giving off 30,000 BTU/hr
- 12" x 12" cast iron top grates are removable for easy cleaning
- Each burner has an individual standing pilot light
- Push-in chrome knob w/ efficient Hi-Low burner system
- Removable crumb tray

Griddle

- 40,000 BTU/hr
- 3/4" thick griddle plate
- 4" welded griddle side shields
- Stainless steel U burner
- Heat every 6" — valve control every 12"
- Manual controls

Oven

- 30,000 BTU/hr total output
- Flame failure safety device
- Adjustable thermostat from 250°F to 550°F
- Steel liner on door & sides w/ a nano porcelain oven liner
- (2) removable & adjustable oven racks per oven
- Cool to touch stainless steel oven door handles

Construction

- Stainless steel front, back, riser & shelf
- Spring loaded door w/ cool to touch stainless steel oven door handle
- 6" stainless steel adjustable legs
- 3/4" NPT rear gas connection

Optional Accessory

- 4" swivel casters


K6G24


Gas Regulator Included

WARRANTY

Kintera Gas Cooking Equipment is warranted to be free from defects in material and workmanship under normal use and service for a period of 1 year from the date of original purchase.

IMPORTANT INFORMATION

- A pressure regulator is provided with this unit.
Natural Gas 4" (102 mm) W.C.
Propane Gas 10" (279 mm) W.C.
- Units supplied with LP conversion kit.
- 3/4" NPT rear gas connection.
- 60" range

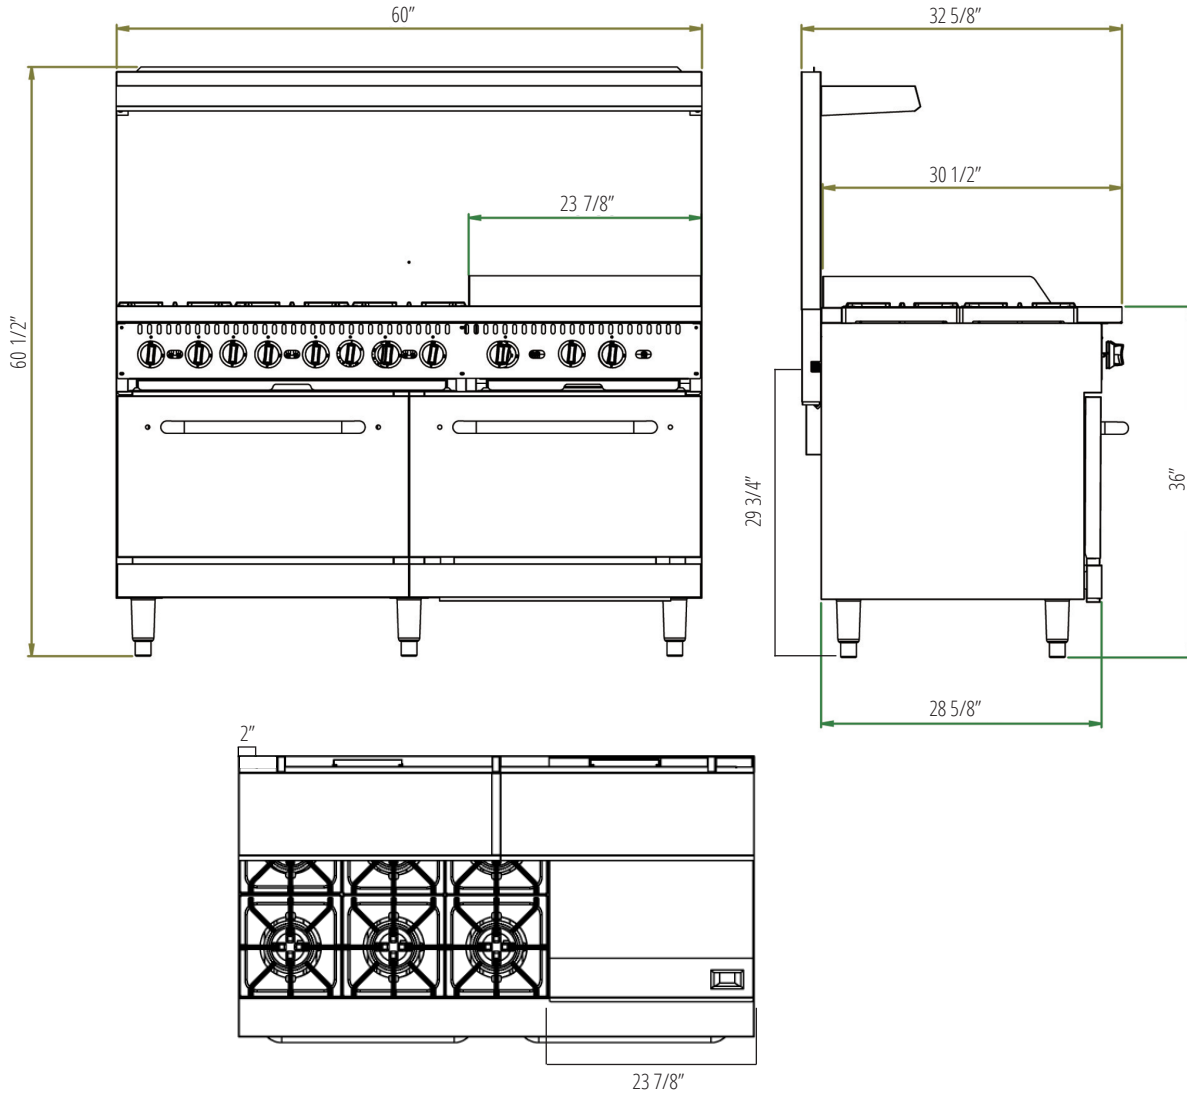

Model	Product ID	External Dimensions (in)			Internal Oven Dimensions (in)			BTU's (per open burner)	BTU's (per oven)	BTU's (griddle burner)	Total BTU's	Crated Weight (lbs)
		W	D	H	W	D	H					
K6G24	919588	60	32 5/8	35 9/10 + 24 3/5	26 7/8	25 4/5	13 4/5	30,000 x 6	30,000 x 2	20,000 x 2	280,000	816